
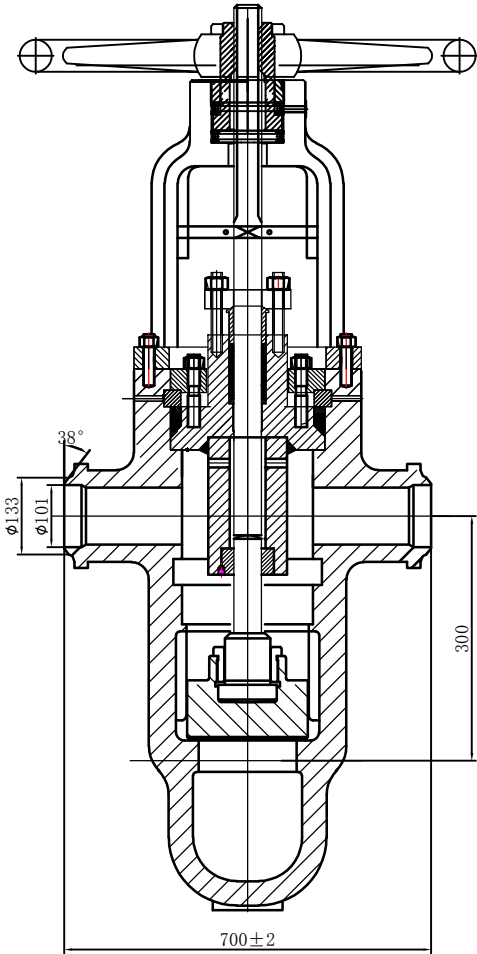


Performance Specifications				
Nominal Pressure (PN)		25.0		MPa
Shell Test		37.5		
Seat Test		27.5		
Operating Temperature	<200°C	Working Pressure	25.0	
	<425°C	Pressure	13.76	
Applicable Media: Water, Steam, Oil Products				

Technical Requirements

- 1.Design and manufacturing standard: In accordance with NB/T 47044-2014.
- 2.Face-to-face dimensions: As per manufacturer's standard.
- 3.Testing and inspection standard: In compliance with NB/T 47044-2014.
- 4.Weld end preparation: According to NB/T 47044-2014.
- 5.Nozzle dimensions: As per customer-supplied connection dimensions.

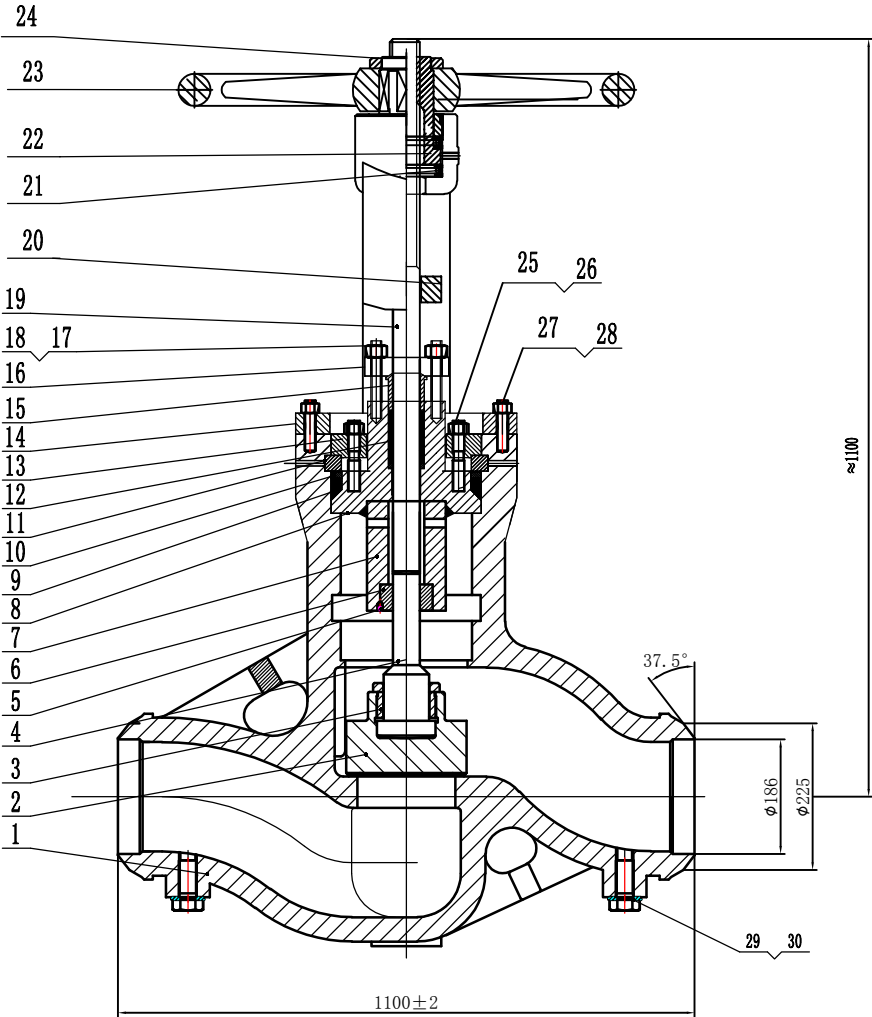

15	Gland Bush	A182 F6a	30	Plug M20	A1035		
14	Bracket	WCB	29	Plug Gasket	Copper		
13	Clamp Plate	A1035	28	Hex Nut	A194 2H		
12	Packing	Graphite	27	Stud Bolt	A193 B7		
11	Split Ring (6-Piece)	A1035	26	Equal-Length Stud	A194 2H		
10	Spacer Ring	A1035	25	Hex Nut	A193 B7		
9	Sealing Ring	Graphite	24	Locking Cap	A1035		
8	Self-Sealing Bonnet	A105	23	Handwheel	KTH-330-08		
7	Extension Sleeve	A1035	22	Stem Nut	H59		
6	Guide Sleeve	Copper Alloy	21	Bearing	ASTM 51200		
5	Set Screw	A1035	20	Clamping Plate	A1035		
4	Lower Stem	A182 F6a	19	Upper Stem	A182 F6a		
3	Disc Cover	A1035	18	Hex Nut	A194 2H		
2	Disc	A105+STL	17	Stud Bolt	A193 B7		
1	Valve Body	WCB+STL	16	Gland Plate	A1035		
No.	Name		Material	No.	Name		Material
Volume		Wooden case: 1450LX1190WX900H			Outlet Check Valve		
Weight		Approx: 420KG			H61Y-250C-DN175		
		Drawing		Auditing	DN175-PN250		
		Approve		Date	Assemble Drawing		